



Class D System / cat.5e - 100MHz, shielded

#### **Product Information**

Patch panel BKT 19" 1U, cat.5e, shielded, 48xRJ45, black

Card No.: PI\_11301112.2\_01.21



## **Application**

BKT IDC Patch panel serve as terminals for wire cables laid vertically or horizontally and function as a connecting point for active equipment working within a network. All elements feature high quality transmission and mechanical parameters.

#### **Features**

- Patch panel designed in 19" standard with a height of 1U
- Integrated cabling shelf for securing cables using cable ties
- 48 shielded RJ45 ports
- Slot connection IDC LSA for cables with 22-26 AWG
- Color-coded terminals according to T568A and T568B schemes
- Fixing the wires in the IDC slot can be done by LSA tool
- · Grounding wire
- Black colour RAL 9005
- Size (H x W x D) 43,6mm x 482,6mm x 92,3mm

#### **Standards**

- EN 50173-1
- EN 60297-3-100
- ISO/IEC 11801
- IEC 60297-3-100

- ANSI/TIA-568.2
- EIA-310-E
- RoHS 2011/65/EU







Class D System / cat.5e - 100MHz, shielded

## **Product Information**


Patch panel BKT 19" 1U, cat.5e, shielded, 48xRJ45, black

Card No.: PI\_11301112.2\_01.21

# **Physical and mechanical properties**

Specification	- T568A & T568B wiring map printing in IDC slot - housing: galvanized steel tin plated (SECC) 1,5 mm thick, powder painted in black
Durability	- RJ45 socket: 750 cycles plug mating and unmating test, insertion cycles at 20 cycles/minute max. contact resistance test per 100 cycles
RJ45 socket	- housing: poli tereftalato butylene (PBT) UL 94V-0 - shield: bronze nickel plated
RJ45 socket conntact	- material: phosphor bronze 1,2÷1,5 μm nickel plated - finish: 1,2 μm gold plated on 1,2 μm - 1,5 μm nickel layer
IDC	- housing: PC+5%GF , UL 94V-2 - IDC pins: phosphor bronze 1,2 μm tin plated - adapted for LSA tool
RJ45 plug insertion force	<9N
RJ45 plug retention strenght	>75N

# **Dimensions** [mm]

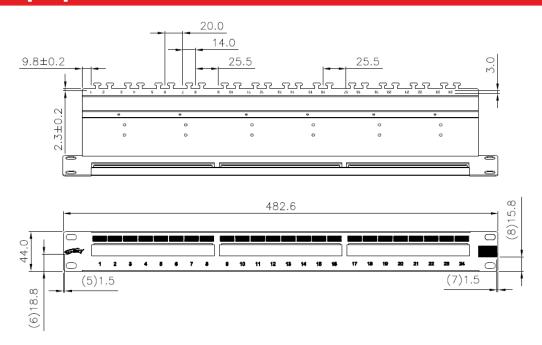

## **Performance / Variants**

Index	Product description
11301112.2	Patch panel BKT 19'' 1U, cat.5e, shielded, 48xRJ45, black