



Class D, E, E_A System / cat. 5e, 6, 6_A, shielded

Product Information

Patch panel BKT 19" 0.5U, modular, shielded, 24xkeystone, black

Card No.: PI_11305117_01.21



Application

BKT patch panels make it easier to manage the network infrastructure and take care of their aesthetics. The 0.5U crossover panel has been specially designed to maximally pack in the cabinets the toolless BKT RJ45 keystone modules, allowing to increase the equipment of the ICT cabinets by 100%. Thanks to its construction, it finds application in Data Centers and server rooms. Thanks to the use of colorful description fields, they facilitate network management.

Features

- Modular patch panel 19" with a height of 0,5U for mounting tool and tool free Keystone BKT modules
- Possibility of mounting up to 24 shielded and unshielded Keystone BKT modules
- Replaceable paper labels available in 5 colors
- Integrated cable organizer for holding cables using cable ties
- Metal construction ensuring galvanized connection with module shielding
- Grounding wire
- · Black color RAL 9005
- Dimensions (H x W x D) 22,2mm x 482,6mm x 150mm

Standards

- EN 50173-1
- EN 60297-3-100
- ISO/IEC 11801
- IEC 60297-3-100

- ANSI/TIA-568.2
- EIA-310-E
- RoHS 2011/65/EU







Class D, E, E_A System / cat. 5e, 6, 6_A, shielded

Product Information

Patch panel BKT 19" 0.5U, modular, shielded, 24xkeystone, black

Card No.: PI_11305117_01.21


Special features

The possibility of mounting all BKT RJ45 keystone modules shielded and unshielded


Interchangeable labels available in 5 colors. They facilitate network management

The set contains the grounding wire ended with "eye connector" on both sides











Metal construction ensuring galvanized connection with module shielding



Integrated cable organizer for fixing cable with cable ties





Class D, E, E_A System / cat. 5e, 6, 6_A, shielded

Product Information


Patch panel BKT 19" 0.5U, modular, shielded, 24xkeystone, black

Card No.: PI_11305117_01.21

Physical and mechanical properties

| Support bar | SPCC, 1,5 mm thickness color black RAL9005 |
|----------------|---|
| Rear Panel | SPCC, 1,5 mm thickness with zinc plated |
| Front plate | ABS UL 94-HB |
| Identification | ID plate: PC, UL-94-V2 |
| Ground wire | 18 AWG wire green yellow stripped color 40cm length |

Dimensions

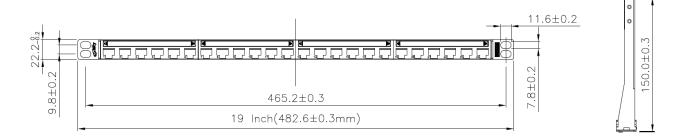

Performance / Variants

| Index | Product description |
|----------|---|
| 11305117 | Patch panel BKT 19" 0.5U, modular, shielded, 24xkeystone, black |