


Product Information

BKT 19" Hanging Cabinet 9U 600/600/500 (width/depth/height) IP55 RAL7035

No. Card PI_11006004.1_02.16

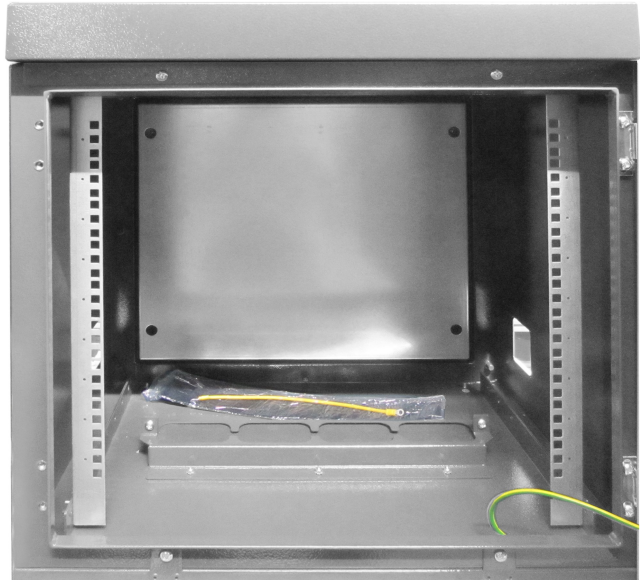

Application

- Wall hanging cabinet
- Protection of the mounted equipment from weather conditions and access by unauthorised persons

Standards

- RoHS—Restriction of the use of certain hazardous substances in electrical and electronic equipment
- EN ISO 9001:2008—Quality management
- EN ISO 14001:2004—Environmental management
- PN-EN 60439-5—Mechanical impact resistance test
- PN-EN 60529—IP rating tests

Features

- Two component polyurethane gasket on the interior door cladding (hot melt foamed-in-place)
- Electrolytically galvanized sheet steel
- One point locking system
- RAL7035 outdoor colour
- IP55 protection degree
- Foam cable gland unit in the floor

Product Information

BKT 19" Hanging Cabinet 9U 600/600/500 (width/depth/height) IP55 RAL7035

No. Card PI_11006004.1_02.16

Construction

- Mounting plate on the rear cabinet wall
- 19" 9U vertical mounting profile (at the front of the cabinet)
- Foam cable gland unit in the cabinet floor
- Right and left hand door installation
- One point locking system

Optional accessories

- 110A9300—BKT fan with filter RAL7035 FPF08KR230BE-110
- 110A9301—BKT filter RAL7035 FPF08KUG-100
- Wall or pole mounting bracket

Performance/Variants

Type	Width (mm)	Depth (mm)	Height (mm)
9U	600	500	600