


Product Information

Underground metal plinth BKT 800/800 (W/D) RAL 7035 - stainless steel

No. Card PI_110A4002._01.17

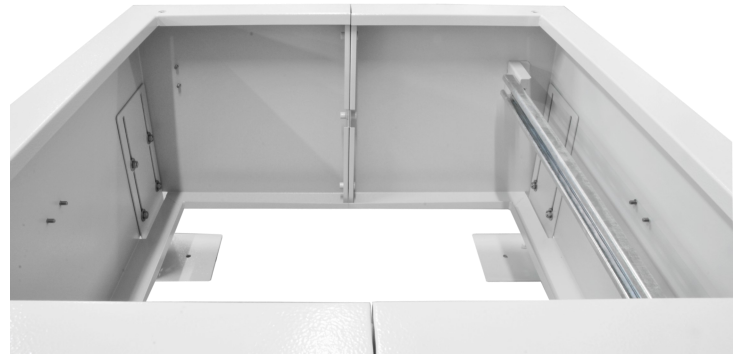

Application

- Positioning of the cabinet in the ground

Standards

- RoHS—Restriction of the use of certain hazardous substances in electrical and electronic equipment
- EN ISO 9001:2008—Quality management
- EN ISO 14001:2004—Environmental management

Construction

- Is equipped with crossbars for fixing cable tubes. Using cable tubes simplifies the process of cable entry
- Is delivered with 4 screws, for fixing plinth to the cabinet
- Has markings on the left and right side (50mm from the its top) showing the proper depth of installing it in the ground
- Is equipped with four levelling feet with smooth regulation. Smooth feet regulation allows proper plinth levelling

Features

- Welded structure with reinforcing crossbars fixed with screws
- Material uses : 1,5mm thick stainless steel, painted to RAL7035

Product Information

Underground metal plinth BKT 800/800 (W/D) RAL 7035 - stainless steel

No. Card PI_110A4002._01.17

Optional accessories

- 110A1503— BKT 19" outdoor cabinet 22U 800/800/1195 (W/D/H) IP55, RAL7035, (double wall, one-chamber, single door)
- 110A1507— BKT 19" outdoor cabinet 30U 800/800/1555 (W/D/H) IP55 RAL7035 (aluminum, double wall, one-chamber, single door)
- 110A1509— BKT 19" outdoor cabinet 35U 800/800/1775 (W/D/H) IP55 RAL7035 (aluminum, double wall, two-chamber, double door)
- 110A1603— BKT 19" outdoor cabinet 22U 800/800/1195 (W/D/H) IP55 RAL7035 (aluminum, single wall, one-chamber, single door)
- 110A1607— BKT 19" outdoor cabinet 30U 800/800/1555 (W/D/H) IP55 RAL7035 (aluminum, single wall, one-chamber, single door)
- 110A1609— BKT 19" outdoor cabinet 35U 800/800/1775 (W/D/H) IP55 RAL7035 (aluminum, single wall, two-chamber, double door)

Performance/Variants

Type	Width (mm)	Depth (mm)	Height (mm)
110A4002	800	800	about 600